


ELEVIEL SEE WHAT YOU'VE BEEN MISSING



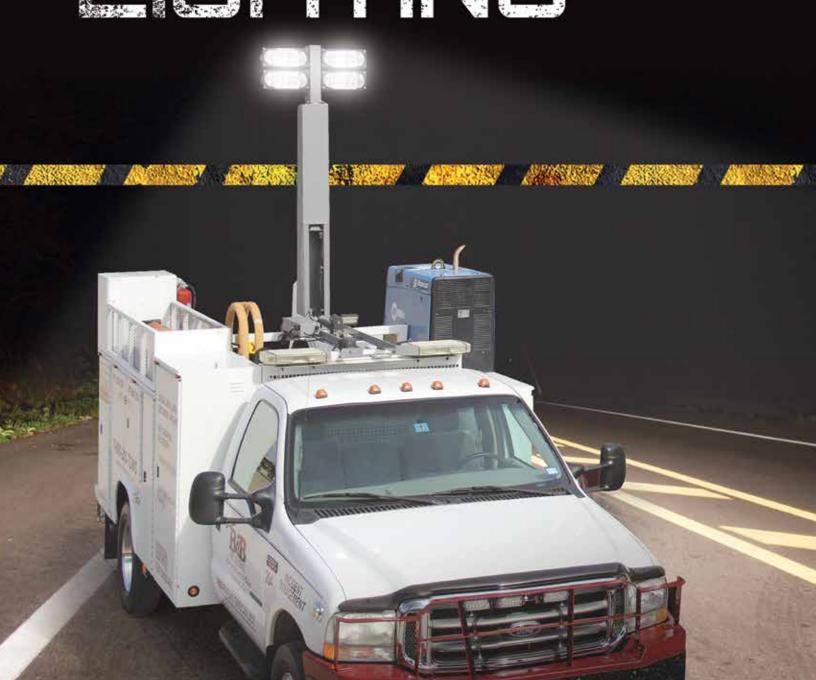

WORK BRIGHTER (NOT HARDER IN THE DARK)

Command Light features a patented all-electric light tower design that provides endless positions to maximize directional lighting to increase work area visibility. Rotate the tower, backlight the space or overhang the vehicle with a Command Light tower. Plus, with roadway crew fatalities up year over year, scene lights and traffic flow boards are more essential than ever. Turn night into day.

ELEVATE YOUR TRUCK LIGHTS

Command Light offers a variety of LED scene lighting solutions capable of directing light to illuminate any work area. As you consider lighting options, ask yourself, "Can my truck-mounted lights do this?"

- ✓ **ELEVATE THE LIGHT SOURCE** to illuminate a scene without creating the usual harsh, blinding glare
- ✓ ROTATE 36Ø DEGREES to direct valuable light
- ✓ PROVIDE BACKLIGHTING* to illuminate dual areas
- ✓ DEPLOY IN 15 SECONDS OR LESS
- ✓ Equip you with another tool that makes your services EVEN MORE VALUABLE TO CUSTOMERS

Command Light specializes in vehicle scene lighting, offering a patented light tower design that has been trusted for decades. To help you navigate Command Light's broad lineup, this catalog is organized by tower height (ie. Series), the number of heads, light fixture selection and optional tower features.

$(\mathbf{1})$

SELECT THE IDEAL SIZE



OUR TALLEST TRUCK TOWER

THE KNIGHT SERIES
Page 4



INDUSTRY FAVORITE

THE SHADOW SERIES



TRIPODS

CHOOSE POWER + LEDS
Pages 6-9



ECONOMICAL ELEVATION

THE SHADOW STRAIGHT



COMPACT LIGHTING

THE C-LITE
Page 12



SPECIFY LIGHT SOURCE DETAILS



NO. OF HEADS

CHOOSE BETWEEN 1, 2, 4 OR 6

The number of heads will determine how much light you can gather and direct using rotation, angling and optional backlight.



LIGHT FIXTURES

DC-POWERED LEDS

Choose from a variety of DC-powered LED fixtures with varying light output and power requirements.



ADD OPTIONAL FEATURES



BACKLIGHT

The backlight option enables the bottom row of lamp heads to rotate 180°, making it possible to light both sides of the scene.



TOP-MOUNTED STROBE

Alert oncoming traffic earlier with a strobe mounted on top of the light tower. Available in green, red, amber, blue or clear.



LONG ARM

Get additional reach with an 80" long arm.



TOP-MOUNTED CAMERA

A top-mounted camera provides additional 360° views for operators. Choose from the INTEC, Safety Vision or Zone Defense video systems. Learn more about these cameras at commandlight.com/360-vehicle-cameras.



CUSTOM COLORS

Optional colors include powder-coated white, red and black. Towers can be wet painted to any color. (Standard: Powder-coated gray.)








POWDER-COATED OPTIONS



7.5-FOOT REACH



"STREETLIGHT" POSITION

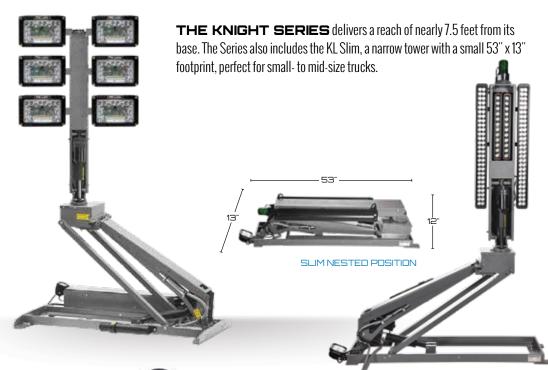

















************* HiViz 60w

Helios

FRC Radiant Command

FRC Spectra

FRC Spectra Max

Lightforce HTX

Whelen Pioneer Plus PFH2

		·	Ü				
6 HEAD	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL415D-AR	Akron Revel 110W	12V DC - 80 amps 960W	14,000 lumens	84,000 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52" x 34" 2,225 mm x 1,320 mm x 865 mm	
KL415D-CH	FireTech Helios 60W	12V DC - 55 amps 660W	14,000 lumens	84,000 lumens	12" x 47" x 28" 305 mm x 1,195 mm x 710 mm	87.5" x 52" x 28" 2,225 mm x 1,320 mm x710 mm	165 lbs 75 kg
KL408D-W1	Whelen Pioneer Plus PCH1 75W	12V DC - 63 amps 750W	10,130 lumens	60,780 lumens	14" x 47" x 23" 355 mm x 1,195 mm x 585 mm	87.5" x 52 " x 23" 2,225 mm x 1,320 mm x 585 mm	

4 HEAD	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL415D-FR	FRC Radiant Command 120W	12V DC - 65 amps 780W	17,000 lumens	68,000 lumens	12" x 47" x 30" 305 mm x 1,195 mm x 760 mm	87.5" x 52" x 30" 2,225 mm x 1,320 mm x 760 mm	
KL415D-FS	FRC Spectra 220W	12V DC - 98 amps 1,180W	20,000 lumens	80,000 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52" x 34" 2,225 mm x 1,320 mm x 865 mm	
KL415D-FX	FRC Spectra Max 230W	12V DC - 100 amps 1,220W	28,000 lumens	112,000 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52" x 34" 2,225 mm x 1,320 mm x 865 mm	165 lbs 75 kg
KL415D-LX	Lightforce HTX LED/HID 150W	12V DC - 75 amps 900W	13,500 lumens	54,000 lumens	14" x 47" x 31" 355 mm x 1,195 mm x 785 mm	87.5" x 52" x 31" 2,225 mm x 1,320 mm x 785 mm	
KL415D-W2	Whelen Pioneer Plus PFH2 150W	12V DC - 75 amps 900W	20,261 lumens	81,044 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52" x 34" 2,225 mm x 1,320 mm x 865 mm	

SLIM	LIGHTING	POWER	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL409D-H4	(2) FireTech HiViz - 270W (2) FireTech HiViz - 60W	12V DC - 960W	270W: 28,500 60W: 6,500	70,000 lumens	12" x 53" x 13" 305 mm x 1,345 mm x 330 mm	87.5" x 53" x 13" 2,225 mm x 1,345 mm x 330 mm	165 lbs 75 kg

THE SHADOW SERIES is ideal for utility vehicles. This compact

65-lb. tower has a reach of more than 4 feet from its base (or 10' with optional

80" arm) and provides 355° of rotation.




4.5- TO 6.5-FOOT REACH











FRC Spectra









Helios

Lightforce HTX

Whelen Pioneer Plus PCH1 Whelen Pioneer Plus PFH2

	Name of the last o	No.					
4 HEAD	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL442D-AR	Akron Revel 110W	12V DC - 52 amps 960W	14,000 lumens	56,000 lumens	8" x 54" x 34" 205 mm x 1,375 mm x 865 mm	55" x 36" x 34" 1,395 mm x 915 mm x 865 mm	
SL442D-CH	FireTech Helios 60W	12V DC - 35 amps 420W	14,000 lumens	56,000 lumens	8" x 54" x 28" 205mm x 1,375 mm x 710 mm	55" x 36" x 28" 1,395 mm x 915 mm x 710 mm	
SL442D-FR	FRC Radiant Command 120W	12V DC - 55 amps 660W	17,000 lumens	68,000 lumens	8" x 54" x 28" 205 mm x 1,375 mm x 710 mm	55" x 36" x 28" 1,395 mm x 915 mm x 710 mm	
SL442D-FS	FRC Spectra 220W	12V DC - 90 amps 1,060W	20,000 lumens	80,000 lumens	8" x 54" x 34" 205 mm x 1,375 mm x 865 mm	55" x 36" x 34" 1,395 mm x 915 mm x 865 mm	75 lbs
SL442D-FX	FRC Spectra Max 230W	12V DC - 90 amps 1,100W	28,000 lumens	112,000 lumens	8" x 54" x 34" 205 mm x 1,375 mm x 865 mm	55" x 36" x 34" 1,395 mm x 915 mm x 865 mm	35 kg
SL442D-LX	Lightforce HTX LED/HID 150W	12V DC - 65 amps 780W	13,500 lumens	54,000 lumens	8" x 56" x 23" 205 mm x 1,420 mm x 585 mm	57" x 46" x 23" 1,450 mm x 1,170 mm x 585 mm	
SL442D-W1	Whelen Pioneer Plus PCH1 75W	12V DC* - 40 amps 480W	10,130 lumens	40,520 lumens	8" x 54" x 22" 205 mm x 1,375 mm x 560 mm	55" x 36" x 22" 1,395 mm x 915 mm x 560 mm	
SL442D-W2	Whelen Pioneer Plus PFH2 150W	12V DC* - 65 amps 780W	20,261 lumens	81,044 lumens	8" x 54" x 33" 205 mm x 1,375 mm x 835 mm	55" x 36" x 33" 1,395 mm x 915 mm x 835 mm	

2 HEAD	LIGHTING	POWER	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL422D-FR	FRC Radiant Command 120W	12V DC - 35 amps 420W	17,000 lumens	34,000 lumens	8" x 54" x 28" 205 mm x 1,375 mm x 710mm	55" x 36" x 28" 1,395 mm x 915 mm x 710 mm	
SL422D-FS	FRC Spectra 220W	12V DC - 42 amps 620W	20,000 lumens	40,000 lumens	8" x 54" x 34" 205 mm x 1,375 mm x 865 mm	55" x 36" x 34" 1,395 mm x 915 mm x 865 mm	
SL422D-FX	FRC Spectra Max 230W	12VDC - 54 amps 640W	28,000 lumens	56,000 lumens	8" x 54" x 34" 205mm x 1,375 mm x 865 mm	55" x 36 " x 34" 1,395 mm x 915 mm x 865 mm	70 lbs 32 kg
SL422D-W1	Whelen Pioneer Plus PCH1 75W	12V DC* - 20 amps 330W	10,130 lumens	20,260 lumens	8" x 54" x 22" 205 mm x 1,375 mm x 560 mm	55" x 36" x 22" 1,395 mm x 915 mm x 560 mm	
SL422D-W2	Whelen Pioneer Plus PFH2 150W	12V DC* - 35 amps 480W	20,261 lumens	40,522 lumens	8" x 54" x 33" 205 mm x 1,375 mm x 840 mm	55" x 36" x 33" 1,395 mm x 915 mm x 840 mm	

SLIM	LIGHTING	POWER	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL423D-H2	(2) FireTech HiViz - 270W	12V DC - 60 amps 720W	28,500 lumens	57,000 lumens	8" x 63" x 11" 605 mm x 1,600 mm x 280 mm	66" x 42" x 11" 1,675 mm x 1,600 mm x 280 mm	65 lbs 35 kg

TRIDENT



- ✓ AC POWER
- ✓ TRUCK 12 V DC
- ✓ DEWALT® FLEXVOLT™
- ✓ HURST® EWXT™ / E3™
- ✓ MAKITA® XGT
- ✓ MILWAUKEE® M28


YOUR LED HEAD...

- AKRON REVELS
- ✓ FRC RADIANT COMMAND
- ✓ FRC SPECTRAS
- ✓ FIRETECH HELIOS
- **WHELENS**
- ARROW STICKS
- MESSAGE BARS

DESIGNED TO WORK WITH YOUR EXISTING BATTERY-POWERED TOOLS

TRIPOD

elevate scene lighting, this time revolutionizing the tripod lighting market with the introduction of the all-NEW Trident Tripod, the only tripod of its kind that lets departments choose their power source, plus their favorite firefighter LED. Pair Truck 12V DC or one of four different non-proprietary battery options with Akron Revels, FRC Spectras, Radiant Commands, FireTech Helios, Whelen PioneerPlus, Feniex Arrow Stick or Federal Signal Message Bar.

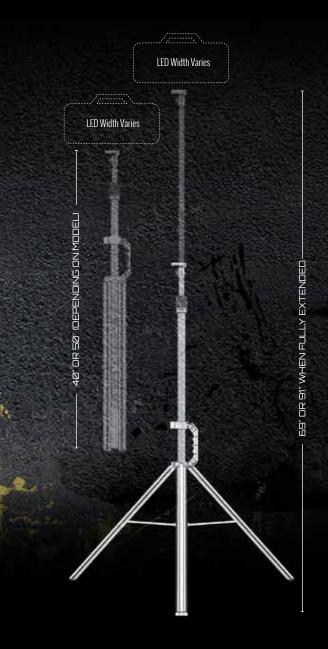



BATTERY TRIPODS

















100

minutes

67

minutes

67

minutes

165

minutes

110

minutes

110

minutes



Akron Revel SL

Akron Revel XL

FireTech Helios

FRC Radiant

FRC t Mini Spectra

atra

FRC Spectra

Whelen Pioneer Plus™ PCH1

Whelen Pioneer Plus™ PFH2

Feniex Arrow Stick

ESTIMATED RUN TIME **

Federal Message Bar

	LIGHTING	POWER REQ.	WT.*	TOTAL OUTPUT	DeWalt FLEXVOLT 9Ah	DeWalt FLEXVOLT 12Ah	Makita XGT 4Ah	Makita XGT 5Ah	Makita XGT 8Ah	Milwaukee M28 3Ah	Milwaukee M28 5Ah	HURST® EWXT / E3™ 5Ah	HURST® EWXT/E3™ 9Ah
TXXD-FN-BX	FRC Mini Spectra x 1	130W	35 lbs 16 kg	14,000 lumens	79 minutes	105 minutes	70 minutes	85 minutes	TBD	62 minutes	99 minutes	Х	Х
TXXD-FR-BX	FRC Radiant Command x1	120W	35 lbs 16 kg	17,000 lumens	86 minutes	114 minutes	76 minutes	92 minutes	TBD	68 minutes	107 minutes	Х	Х
TXXD-FS-BX	FRC Spectra x 1	220W	30 lbs 13 kg	20,000 lumens	49 minutes	64 minutes	40 minutes	50 minutes	TBD	34 minutes	54 minutes	Х	Х
TXXD-W1-BX	Whelen PCH1 x1	75W	25 lbs 11 kg	10,130 lumens	145 minutes	192 minutes	130 minutes	160 minutes	TBD	105 minutes	172 minutes	Х	Х
TXXD-W12-BX	Whelen PCH1 x 2	150W	35 lbs 16 kg	20,260 lumens	74 minutes	96 minutes	65 minutes	81 minutes	TBD	54 minutes	86 minutes	X	Х
TXXD-W2-BX	Whelen PFH2 x1	150W	30 lbs 13 kg	20,261 lumens	74 minutes	96 minutes	65 minutes	81 minutes	TBD	54 minutes	86 minutes	X	Х
TXXD-CH-BX	FireTech Helios x 1	60W	30 lbs 13 kg	14,000 lumens	135 minutes	175 minutes	94 minutes	150 minutes	TBD	96 minutes	153 minutes	Х	х
TXXD-CH2-BX	FireTech Helios x 2	120W	45 lbs 20 kg	28,000 lumens	67 minutes	87 minutes	47 minutes	75 minutes	TBD	48 minutes	76 minutes	Х	Х
TXXD-AR-BX	Akron Revel SL x 1****	110W	25 lbs 11 kg	14,000 lumens	85 minutes	110 minutes	75 minutes	93 minutes	TBD	64 minutes	102 minutes	58 minutes	88 minutes
TXXD-AX-BX	Akron Revel XL x 1****	220W	35 lbs 16 kg	28,000 lumens	42 minutes	55 minutes	37 minutes	46 minutes	TBD	32 minutes	51 minutes	29 minutes	44 minutes



60W Max

90W Max

90W Max

35 lbs

16 kg

35 lbs

16 kg

35 lbs

16 kg

Replace BX with power designation from chart on right.

Arrow patterns

and floodlight

Digital message

in amber

Digital message

in blue

TXX = TRIPOD HEIGHT T40 = 40" Tripod T50 = 50" Tripod

TXXD-LB-BX

TXXD-FBA-BX

TXXD-FBB-BX

60w Feniex Light Bar***

Amber Federal Message Bar

Blue Federal Message Bar

DC LED CHART DISCLAIMERS

- * Weights listed with no options.
- ** Reported run times based on fully charged batteries at 70° F; temperature and battery condition can impact tripod performance. Light blinks three times to warn of low-battery conditions.

150

minutes

100

minutes

100

minutes

200

minutes

133

minutes

133

minutes

120

minutes

80

minutes

minutes

150

minutes

100

minutes

minutes

TBD

TBD

TBD

- *** Light/message bar run times based on floodlight pattern. Multiply minutes by 2 for average arrow patterns.
- **** HURST-powered tripods are only available with Akron Revel fixtures or light/message bars.



MODEL ORDERING GUIDE

165

minutes

110

minutes

minutes

300

minutes

200

minutes

200

minutes

The Truck Power Option

Shore Power Option

Li2 - Battery Ah

BD-Battery / Charger Selection

MOD-D-D = 12V DC

T50 - T40 = 40" Tripod: T50 = 50" Tripod











DeWalt® FLEXVOLT™

Makita® XGT

Milwaukee® M28

HURST® EWXT™ / E3™

Truck 12V DC

DC POWER OPTIONS

DC OPTIONS*	DESCRIPTION					
DELETE BX*	No Battery Capability, 12V DC-Powered Tripod ONLY					
BD	Battery Option - DeWalt FLEXVOLT Ready					
BD-09	BD-09 DeWalt FLEXVOLT 9Ah Battery and Fast Charger					
BD-12	DeWalt FLEXVOLT 12Ah Battery and Fast Charger					
ВК	Battery Option - Makita XGT Ready					
BK-04 Battery Option - Makita XGT 4Ah Battery and Charger						
BK-05	Battery Option - Makita XGT 5Ah Battery and Charger					
BK-08	Battery Option - Makita XGT 8Ah Battery and Charger					
BW	Battery Option - Milwaukee M28 Ready***					
ВН	Battery Option – HURST EWXT / E3 Ready ****					
SP**	120V AC Shore Power Option - 15A Plug					
TP	12V DC Truck Power Option					
TP-MB	12V DC Truck Power Option + Truck Mounting Brackets with Quick Disconnect					

BUNDLES	MODEL	DESCRIPTION			
POWER	TXXD-FS-BD-12-SP	40" or 50" Tripod, 220W FRC Spectra LED x1, DeWalt 12Ah Battery + Charger, 120V AC Shore Power			
BUNDLES	TXXD-FS-BK-05-SP	40" or 50" Tripod, 220W FRC Spectra LED x 1, Makita 5Ah Battery + Charger, 120V AC Shore Power			
BALANCED	TXXD-W2-BD-12-SP	40" or 50" Tripod, 150W Whelen PFH2 LED x 1, DeWalt 12Ah Battery and Charger, 120V AC Shore Power			
BUNDLES	TXXD-W2-BK-05-SP	40"or 50" Tripod, 150W Whelen PFH2 LED x 1, Makita 5Ah Battery + Charger, 120V AC Shore Power			
RUN-TIME	TXXD-CH-BD-12-SP	40" or 50" Tripod, 60W FireTech Helios LED x 1, DeWalt 12Ah Battery + Charger, 120V AC Shore Power			
BUNDLES	TXXD-CH-BK-05-SP	40" or 50"Tripod, 60W FireTech Helios LED x 1, Makita 5Ah Battery + Charger, 120V AC Shore Power			
VALUE	TXXD-AR-BD-09-SP	40" or 50" Tripod, 110W Akron Revel SL LED x 1, DeWalt 9Ah Battery + Charger, 120V AC Shore Power			
BUNDLES	TXXD-AR-BK-04-SP	40" or 50" Tripod, 110W Akron Revel SL LED x 1, Makita 4Ah Battery + Charger, 120V AC Shore Power			

- DC POWER OPTION DISCLAIMERS:

 * Must pick 1 Battery Option or Truck Power Option.

- ** Must pick I Battery uption or Truck Fower Option.

 ** Shore Power only available in addition to a Battery Option.

 *** For M28 batteries or chargers, please see your Genesis, TNT or Weber dealer.

 **** HURST®, EWXT®/E3™ and Jaws of Life® are trademarks of HURST Jaws Of Life, Inc. HURST batteries are sold exclusively through the HURST dealer network. The HURST models are only available with Akron LEDs.







STRAIGHT SHADOW

The Straight Shadow is Command Light's most economical solution in maintaining efficient work lighting. Featuring only elevated capabilities (and not rotation), this unit offers a 3.5' reach from its base.







FRC Radiant Command

Whelen Pioneer Plus PFH2

2 HEAD	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SS322D-CH	(2) FireTech Helios 60W	12V DC - 20 amps 240W	14,000 lumens	28,000 lumens	9" x 42" x 30" 230 mm x 1,065 mm x 760 mm	43" x 45" x 30" 1,090 mm x 1,145 mm x 760 mm	
SS322D-FR	(2) FRC Radiant Command	12V DC + 115V or 230V AC 360W	17,000 lumens	34,000 lumens	9" x 42" x 30" 230 mm x 1,065 mm x 760 mm	43" x 45" x 30" 1,090 mm x 1,145 mm x 760 mm	45 lbs 20 kg
SS322D-W2	(2) Whelen Pioneer Plus PFH2 - 150W	12V DC - 34 amps 420W	20,261 lumens	40,522 lumens	8" x 42" x 30" 205 mm x 1,065 mm x 760 mm	43" x 45" x 30" 1,090 mm x 1,145 mm x 760 mm	

C-LITE

The C-Lite is a versatile, compact unit that boasts a LED spotlight/floodlight combo, creating a concentrated beam that allows the operator to illuminate areas not typically reached by fixed lights. The C-Lite has the ability to tilt up to 120° and even rotate with an optional platform.











FireTech Helios

FRC Radiant Command

FRC Spectra


FRC Mini Spectra Whelen Pioneer Plus PCH1

1 OR 2 HEAD	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
CD113D-CH	(1) FireTech Helios 60W	12V DC - 12 amps 140W	14,000 lumens	14,000 lumens	9" x 14" x 19" 230 mm x 355 mm x 485 mm	21" x 14" x 19" 535 mm x 355 mm x 485 mm	35 lbs 16 kg
CD113D-FR	(1) FRC Radiant Command 120W	12V DC - 16 amps 180W	17,000 lumens	17,000 lumens	9" x 14" x 19" 230 mm x 355 mm x 485 mm	21" x 14" x 19" 535 mm x 355 mm x 485 mm	
CD113D-FS	(1) FRC Spectra 220W	12V DC - 25 amps 300W	20,000 lumens	20,000 lumens	9" x 14" x 19" 230 mm x 355 mm x 485 mm	21" x 14" x 19" 535 mm x 355 mm x 485 mm	30 lbs
CD128D-FN	(2) FRC Mini Spectra 130W	12V DC - 29 amps 340W	14,000 lumens	28,000 lumens	9" x 26" x 19" 230 mm x 660 mm x485 mm	21" x 26" x 19" 535 mm x 660 mm x 485 mm	14 kg
CD127D-W1	(2) Whelen Pioneer Plus PCH1 75W	12V DC - 20 amps 230W	10,130 lumens	20,260 lumens	9" x 19" x 19" 230 mm x 485 mm x 485 mm	21" x 19" x 19" 535 mm x 485 mm x 485 mm	



TRAFFIC FLOW BOARDS

With rotational capabilities and multiple arrow patterns, Command Light's Traffic Flow Boards significantly improve on-scene visibility and crew safety. Available in four different traffic patterns, these units conserve space when stowed. Each model comes with standard rotation, giving crews the ability to position traffic advisory arrows toward traffic to alert drivers of crews.

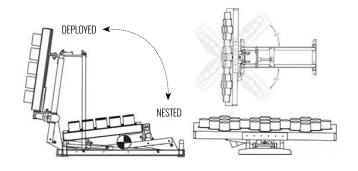



	MOVEMENT	TRAFFIC PATTERN	POWER REQUIREMENTS	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
TFB-H7	Fold-down design	⟨⟨⟨ ⟩⟩⟩ ♦♦ ⟨⟩ ⟨> Greatest pattern variety	12V DC - 28 amps	16" x 60" x 46" 405 mm x 1,525 mm x 1,170 mm	44" x 60" x 66" 1,120 mm x 1,525 mm x 1,675 mm	150 lbs 68 kg
TFB-H5	Fold-down design	Essential traffic patterns	12V DC - 17 amps	8" x 48" x 40" 205 mm x 1,220 mm x 1,015 mm	52" x 70" x 40" 1,320 mm x 1,780 mm x 1,015 mm	80 lbs 36 kg
TFB-SL3	Fold-down design, mounted to a Shadow Series tower	Directional light bar	12V DC - 5 amps • tower requirements	Variable based on tower selection	Variable based on tower selection	14 lbs + tower







The 5 Series offers essential traffic patterns in a lighter design. The board can be deployed via the fold-down design or the vertical pop-up design.



The 3 Series features a light bar that provides a pulsing movement to guide traffic. The light bar mounts to the top of a SL Series light tower. MESSAGE BOARDS ALSO AVAILABLE BY REQUEST!

The 7 Series offers the greatest variety of traffic patterns and can be deployed via the fold-down design or the vertical pop-up design.

