COMMAND LIGHT

ENHANCE YOUR SCENE LIGHTING

YOUR PARTNER IN CRIME AND SAFETY




TOWERS

WHICH TOWER IS RIGHT FOR YOU?

With more than 50 years in emergency lighting, Command Light offers a variety of elevated police light systems for police cars, crime units and command vehicles, taking your warning and emergency scene lighting to the next level. To help you navigate Command Light's broad lineup, this catalog is organized by tower height (ie. Series), number of heads, power requirements and optional features.

1 SELECT THE IDEAL HEIGHT

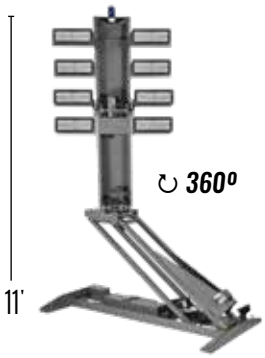


CL SERIES
MOST POWERFUL TOWER

Pages 6-7



KNIGHT SERIES
MID-SIZE HEIGHT

Pages 8-9



SHADOW SERIES
SHORTEST TOWER

Pages 10-12



C-LITE
COMPACT LIGHTING

Page 13

CHOOSE YOUR FIXTURE/POWER CONFIGURATION



2 # OF HEADS
CHOOSE FROM 1, 2, 4, 6 OR 8

The number of heads will determine how much light you can gather and direct using rotation, angling and optional backlight.

8 HEAD ..... Page 6
6 HEAD ..... Pages 7-8
4 HEAD ..... Pages 7, 9, 11
2 HEAD ..... Pages 12-13
1 HEAD ..... Page 13



3 POWER
AC OR DC

Do you need an AC (115/230V) powered unit, a DC (12V or 24V) power or a combination of both? Look for the AC and DC chart labels to help you note the tower's power requirements.



4 LIGHT FIXTURES
LED OR QUARTZ HALOGEN

Looking for LEDs (long-lasting lamps at a lower power draw), or quartz halogen (bright fixtures for less cost)? Refer to the LEDs and QUARTZ HALOGEN labels.

MORE INFO ..... Pages 4-5

For Traffic Advisors, please see Pages 14-15

ADD OPTIONAL FEATURES

5 UPGRADES



BACKLIGHT
Command Light's backlight option enables the bottom row of lamp heads to rotate 180°, making it possible to light both sides of a scene.

TOP-MOUNTED STROBE
Alert oncoming traffic earlier with a strobe, mounted on top of the light tower. Available in green, red, amber, blue or clear.

LONG ARM
Increase the Shadow Series' reach, up to 6.5' with this optional arm.

CUSTOM COLORS
Optional colors include powder-coated white and black. Towers can be wet painted to any color. (Standard: Powder-coated gray.)

STANDARD

POWDER-COATED OPTIONS

WET PAINT (COLOR MATCH TO TRUCK)



TOP-MOUNTED CAMERA
A top-mounted camera provides additional 360° views, allowing responders to view and capture all angles of a scene. Choose from the INTEC, Safety Vision or Zone Defense video systems. Learn more about these cameras at commandlight.com/360-vehicle-cameras.

CONTROL OPTIONS



STANDARD
The Standard Controller comes with a 15 ft (4.5 m) umbilical cord and intuitive buttons, giving crews the ability to control every aspect of the tower and lights.



WIRELESS
Available on any Command Light tower, this optional Wireless Controller has a range of up to 150 ft (45 m) and supplements the Standard Controller.



PANEL-MOUNTED
This Panel-Mounted Controller can be added to a compartment or any protected area. Available on all towers, this option can be used alone or with another controller.



V-MUX / CLASS 1
Operate your light tower via V-Mux or Class 1 in-cab controls, which supplement the Standard Controller and are available on all Command Light towers.

LEDs

LEDs produce long-lasting, energy-efficient lighting by passing a current through a semi-conductor rich in electrons and a semi-conductor that is rich in holes to produce photons – the light that you see.

AC	LEDs	POWER	TOTAL WATTS	OUTPUT
HELIOS*	 Exclusive Command Light fixture that delivers an economical LED!	115V or 230V AC	60W	14,000 lumens
FIRETECH HIVIZ	 Knight Slim exclusive, featuring two 270-watt and two 60-watt fixtures	115V AC	60W 270W	6,500 lumens 28,500 lumens
WHELEN PIONEER PLUS PCP2**	 Spot/flood combination	115V or 230V AC	150W	20,614 lumens
WHELEN PIONEER PLUS PFP2	 Dual panel with flood light	115V or 230V AC	150W	20,442 lumens
WHELEN PIONEER PLUS PFP4	 Quad panel with flood light and Whelen's highest luminous output	115V or 230V AC	300W	40,884 lumens

* An exclusive Command Light fixture, manufactured by FireTech. ** Upgrade from standard Whelen flood to spot/flood combo upon request.

Don't see your favorite fixture below? Other heads are available upon request. Email us at info@commandlight.com to learn more.


All fixtures specifications are provided by the manufacturer and are subject to change: all information is the latest available at the time of publication.

DC		POWER	TOTAL WATTS	OUTPUT
HELIOS*	 Exclusive Command Light fixture that delivers an economical LED!	12V or 24V DC	60W	14,000 lumens
FIRETECH HIVIZ	 Knight Slim exclusive, featuring two 270-watt and two 60-watt fixtures	12V or 24V DC	60W 270W	6,500 lumens 28,500 lumens
FIRETECH SL-X-15***	 More output with less power consumption	12V or 24V DC	185W	15,306 lumens
LIGHTFORCE HTX	 Combines 20 LEDs for flood beam + HID bulb for 1,932 yards of viewing	12V or 24V DC	150W	13,500 lumens
WHELEN PIONEER PLUS PCH1	 Single panel with combo flood/spot and Proclera® silicone optics	12V or 24V DC	75W	10,130 lumens
WHELEN PIONEER PLUS PCH2**	 Spot/flood combination	12V or 24V DC	150W	20,261 lumens
WHELEN PIONEER PLUS PFH2	 Dual panel with combo flood/spot and Proclera® silicone optics	12V or 24V DC	150W	20,261 lumens

* An exclusive Command Light fixture, manufactured by FireTech. ** Upgrade from standard Whelen flood to spot/flood combo upon request. ***Available upon request.

LED RETROFITS

Lengthen the lifespan of your quartz halogen tower by converting it to LED!

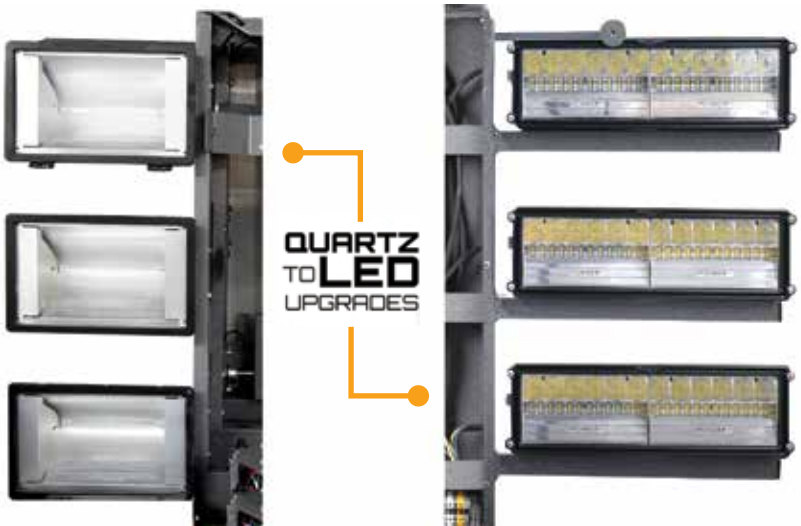

- ✔ Retrofit most in-service quartz halogen 2-, 4- and 6-head towers
- ✔ Update to the latest LED technology from FRC, Whelen and Command Light's very own retrofit fixture, Helios
- ✔ With just your Command Light serial number, we can determine if your tower can be upgraded
- ✔ Cost varies based on fixture selection, complexity of upgrade and the number of heads

SLs and KLs include new lamp trees: CLs include new lamp brackets. Note: Upgrade pricing is not valid on towers less than 1 year old.



See before-and-after footage of a Command Light LED retrofit at bit.ly/LED-retrofit.

CL SERIES

TOWERS WITH 11-FOOT REACH




8 HEAD




THE CL SERIES towers are Command Light's largest units with a reach up to 11 feet from its base, ideal for large command vehicles. These light towers, manufactured using aircraft-grade aluminum, can rotate 360° and tilt, raise and lower with ease to mitigate shadows in all types of situations. Unlike vehicle-mounted perimeter LEDs, this gives officers the ability to direct all usable light. A tower even can be angled to overhang the vehicle to provide operable light near the side of the unit.

OPTIONS (SEE PAGE 3 FOR DESCRIPTIONS)

BACKLIGHT · STROBE · COLOR · CAMERA · CONTROLS



NESTED POSITION



Whelen Pioneer Plus PFP4

LEDs

AC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
CL802A-W4	Whelen Pioneer Plus PFP4 300W	115V or 230V AC 2,700W	40,884 lumens	327,072 lumens	12" x 74" x 43" 305 mm x 1,880 mm x 1,095 mm	131" x 79 " x 43" 3,330 mm x 2,010 mm x 1,095 mm	325 lbs 147 kg

QUESTIONS? CUSTOM TOWER INQUIRIES?
CONTACT US AT INFO@COMMANDLIGHT.COM

6 HEAD LEDs




OPTIONS (SEE PAGE 3 FOR DESCRIPTIONS)

BACKLIGHT · STROBE · COLOR · CAMERA · CONTROLS


FRC Spectra


Whelen Pioneer Plus PFP2


Whelen Pioneer Plus PFP4

AC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HxWxD (NESTED)	HxWxD (UPRIGHT)	WT.
CL602A-HS	(6) FireTech SL-X-15 185W	115V or 230V AC 1,410W	28,000 lumens	168,000 lumens	12" x 74" x 43" 305 mm x 1,880 mm x 1,095	131" x 79" x 43" 3,330 mm x 2,010 mm x 1,095 mm	325 lbs 147 kg
CL602A-FR	(6) FRC Radiant Command 120W	115V or 230V AC 1,020W	17,000 lumens	102,000 lumens	12" x 74" x 40" 305 mm x 1,880 mm x 1,015 mm	131" x 79" x 40" 3,330 mm x 2,010 mm x 1,015 mm	305 lbs 139 kg
CL602A-W2	Whelen Pioneer Plus PFP2 150W	115V or 230V AC 1,200W	20,442 lumens	122,652 lumens	12" x 74" x 43" 305 mm x 1,880 mm x 1,095 mm	131" x 79" x 43" 3,330 mm x 2,010 mm x 1,095 mm	
CL602A-W4	Whelen Pioneer Plus PFP4 300W	115V or 230V AC 2,100W	40,884 lumens	245,304 lumens	12" x 74" x 43" 305 mm x 1,880 mm x 1,095 mm	131" x 79" x 43" 3,330 mm x 2,010 mm x 1,095 mm	

4 HEAD LEDs



OPTIONS (SEE PAGE 3 FOR DESCRIPTIONS)

BACKLIGHT* · STROBE* · CAMERA* · COLOR · CONTROLS

* On this DC tower, amperage only allows for one of these options.


NESTED POSITION


Whelen Pioneer Plus PFH2

DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
CL602D-HS	(4) FireTech SL-X-15 185W	12V DC - 87 amps 1,040W	28,000 lumens	112,000 lumens	12" x 74" x 43" 305 mm x 1,880 mm x 1,095 mm	131" x 79" x 43" 3,330 mm x 2,010 mm x 1,095 mm	325 lbs 147 kg
CL602D-FR	(4) FRC Radiant Command 120W	12V DC - 98 amps 780W	17,000 lumens	68,000 lumens	12" x 74" x 40" 305 mm x 1,880 mm x 1,015 mm	131" x 79 " x 40" 3,330 mm x 2,010 mm x 1,015 mm	305 lbs 139 kg
CL602D-W2	Whelen Pioneer Plus PFH2 150W	12V DC - 75 amps 900W	20,261 lumens	81,044 lumens	12" x 74" x 43" 305 mm x 1,880 mm x 1,095 mm	131" x 79" x 43" 3,330 mm x 2,010 mm x 1,095 mm	305 lbs 139 kg

KL SERIES



THE KNIGHT SERIES, Command Light's mid-size tower, delivers a reach of nearly 7.5 feet from its base. Like the CL Series, the KL Series offers tilt and 360° rotation. Plus, these units are manufactured using aircraft-grade aluminum and yet are roughly half the weight of their taller counterpart, making these towers ideal for vehicles with limited space.



6 HEAD

LEDs

OPTIONS (SEE PAGE 3 FOR DESCRIPTIONS)

BACKLIGHT STROBE COLOR CAMERA CONTROLS


FRC Radiant Command


Helios


Whelen Pioneer Plus PCH1


Whelen Pioneer Plus PFP2


Whelen Pioneer Plus PSP1

AC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL415A-CH	Helios 60W	115V or 230V AC 660w	14,000 lumens	84,000 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52 " x 34" 2,225 mm x 1,320 mm x 865 mm	165 lbs 75 kg
KL415A-FR	FRC Radiant Command 120W	115V or 230V AC 1,020W	17,000 lumens	102,000 lumens	12" x 47" x 29" 305 mm x 1,195 mm x 735 mm	87.5" x 52 " x 29" 2,225 mm x 1,320 mm x 735 mm	
KL408A-W1	Whelen Pioneer Plus PFP2 150W	115V or 230V AC 1,200W	20,442 lumens	122,652 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52" x 34" 2,225 mm x 1,320 mm x 865 mm	
KL415A-W2	Whelen Pioneer Plus PSP1 75W	115V or 230V AC 750W	8,517 lumens	51,102 lumens	12" x 47" x 23" 305 mm x 1,195 mm x 585 mm	87.5" x 52" x 23" 2,225 mm x 1,320 mm x 585 mm	

DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL415D-CH	Helios 60W	12V DC - 55 amps 660W	14,000 lumens	84,000 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52 " x 34" 2,225 mm x 1,320 mm x 865 mm	165 lbs 75 kg
KL415D-AR	Akron Revel SL 110W	12V DC - 80 amps 960W	14,000 lumens	84,000 lumens	12" x 47" x 23" 305 mm x 1,195 mm x 585 mm	87.5" x 52" x 23" 2,225 mm x 1,320 mm x 585 mm	
KL408D-W1	Whelen Pioneer Plus PCH1 75W	12V DC - 63 amps 750W	10,130 lumens	60,780 lumens	12" x 47" x 23" 305 mm x 1,195 mm x 584 mm	87.5" x 52" x 23" 2,225 mm x 1,320 mm x 584 mm	



4 HEAD LEDs



BACKLIGHT* STROBE* CAMERA* COLOR CONTROLS

* On this DC tower, amperage only allows for one of these options.

OPTIONS (SEE PAGE 3)


FRC Radiant Command


Lightforce HTX


Whelen Pioneer Plus PFH2

DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL415D-FR	FRC Radiant Command 120W	12V DC - 65 amps 780W	17,000 lumens	68,000 lumens	12" x 47" x 29" 305 mm x 1,195 mm x 735 mm	87.5" x 52" x 29" 2,225 mm x 1,320 mm x 735 mm	165 lbs 75 kg
KL415D-LX	Lightforce HTX LED/HID 150W	12V DC - 60 amps 900W	13,500 lumens	54,000 lumens	14" x 47" x 31" 355 mm x 1,195 mm x 787 mm	87.5" x 52 " x 31" 2,225 mm x 1,320 mm x 787 mm	
KL415O-W2	Whelen Pioneer Plus PFH2 150W	12V DC - 63 amps 900W	20,261 lumens	81,044 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52 " x 34" 2,225 mm x 1,320 mm x 865 mm	

KL SERIES SLIM

The Knight Slim delivers the Knight Series smallest footprint, stowing flat at just 12" x 13" x 53" thanks to this narrow design, ideal for smaller to mid-size vehicles. This compact tower packs a total output of 70,000 lumens thanks to FireTech fixtures.



OPTIONS (SEE PAGE 3 FOR DESCRIPTIONS)

STROBE* CAMERA* COLOR CONTROLS

* On this DC tower, amperage only allows for one of these options.


HiViz 60w


HiViz 270w

LEDs

AC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL409A-H4	(2) HiViz - 270W (2) HiViz - 60W	115V AC 960W	270W: 28,500 60W: 6,500	70,000 lumens	12" x 13" x 53" 305 mm x 330 mm x 1,346 mm	87.5" x 13" x 53" 2,225 mm x 330 mm x 1,346 mm	165 lbs 75 kg
DC	**LIGHTING**	**POWER REQUIREMENTS**	**OUTPUT (PER LIGHT)**	**TOTAL OUTPUT**	**HXWXD (NESTED)**	**HXWXD (UPRIGHT)**	**WT.**
KL409D-H4	(2) HiViz - 270W (2) HiViz - 60W	12V DC 960W	270W: 28,500 60W: 6,500	70,000 lumens	12" x 13" x 53" 305 mm x 330 mm x 1,346 mm	87.5" x 13" x 53" 2,225 mm x 330 mm x 1,346 mm	165 lbs 75 kg

* Knight Slim requires 18" x 7" x 5" electrical box (mounted nearby).


SL SERIES

THE SHADOW SERIES is Command Light's most compact unit when space is at a premium. These towers have a reach of more than 4 feet from its base (or 6.5' with optional 80" arm), weigh approximately 65 lbs, and are still manufactured using aircraft-grade aluminum alloy for strength. Thanks to this compact size, these units can fit on SUVs, vans and pickup trucks, all the while featuring 355° of rotation.



LIGHTFORCE HTX SPOTLIGHTS Command Light has partnered with Lightforce Lights to deliver the Knight Series KL415D-LX and the Shadow Series SL442D-LX for the industry's best long-distance light. Both towers tout four Lightforce HTX spotlights for extreme long-distance viewing, allowing officers to further themselves from dangerous scenes, while providing rural districts a long-distance beam when terrain prevents an easy approach to the incident.


See installation footage at bit.ly/lightforceHTXinstall

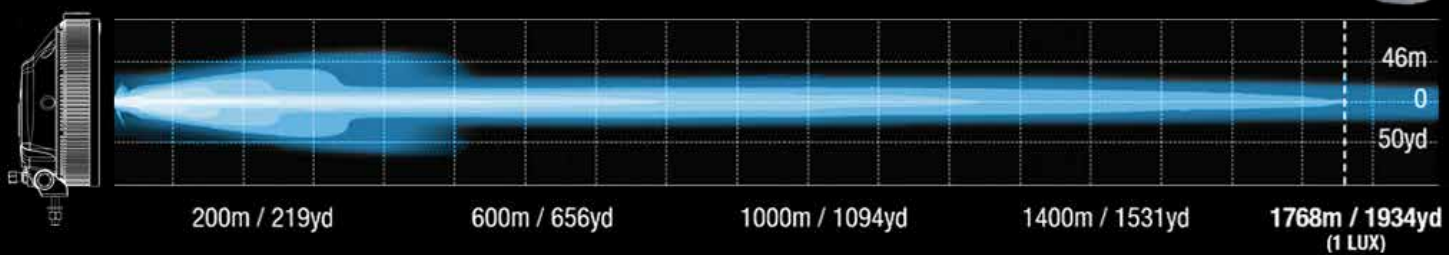

4 HEAD

OPTIONS (SEE PAGE 3 FOR DESCRIPTIONS)

BACKLIGHT · STROBE · COLOR · CAMERA · CONTROLS · LONG ARM

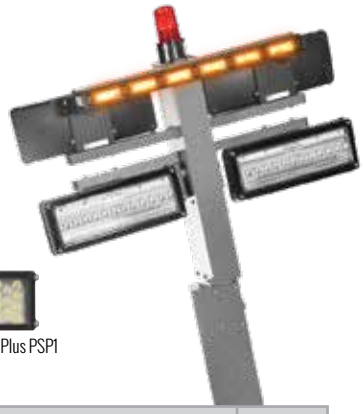

LEDs



Akron Revel SL · FireTech Helios · FRC Radiant Command · Lightforce HTX · Whelen Pioneer Plus PCH1 · Whelen Pioneer Plus™ PFH2 · Whelen Pioneer Plus™ PFP2 · Whelen Pioneer Plus PSP1

AC/DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL442A-CH	FireTech Helios 60W	12V DC • 115V or 230V AC 420W	14,000 lumens	56,000 lumens	8" x 54" x 28" 205 mm x 1,375 mm x 710 mm	55" x 36" x 28" 1,395 mm x 915 mm x 710 mm	75 lbs 35 kg
SL442A–FR	FRC Radiant Command 120W	12V DC • 115V or 230V AC 1,060W	17,000 lumens	68,000 lumens	8" x 54" x 28" 205 mm x 1,375 mm x 710 mm	55" x 36" x 28" 1,395 mm x 915 mm x 710 mm	
SL442A–W1	Whelen PSP1 75W	12V DC • 115V or 230V AC 480W	8,517 lumens	34,068 lumens	8" x 54" x 22" 205 mm x 1,375 mm x 560 mm	55" x 36" x 22" 1,395 mm x 915 mm x 560 mm	
SL442A–W2	Whelen Pioneer Plus PFP2 150W	12V DC • 115V or 230V AC 780W	20,442 lumens	81,768 lumens	8" x 54" x 33" 205 mm x 1,375 mm x 835 mm	55" x 36" x 33" 1,395 mm x 915 mm x 835 mm	

DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL442D-AR	Akron Revel SL 110W	12V DC - 80 amps 960W	14,000 lumens	56,000 lumens	8" x 54" x 34" 205 mm x 1,375 mm x 865 mm	55" x 36 " x 34" 1,395 mm x 915 mm x 865 mm	75 lbs 35 kg
SL442D-CH	FireTech Helios 60W	12V DC - 35 amps 420W	14,000 lumens	56,000 lumens	8" x 54" x 28" 205 mm x 1,375 mm x 710 mm	55" x 36" x 28" 1,395 mm x 915 mm x 710 mm	
SL442D–FR	FRC Radiant Command 120W	12V DC - 55 amps 660W	17,000 lumens	68,000 lumens	8" x 54" x 28" 205 mm x 1,375 mm x 710 mm	55" x 36" x 28" 1,395 mm x 915 mm x 710 mm	
SL442D-LX	Lightforce HTX LED/HID 150W	12V DC - 65 amps 780W	13,500 lumens	54,000 lumens	8" x 56" x 23" 203 mm x 1,422 mm x 585 mm	57" x 46" x 23" 1,448 mm x 1,169 mm x 585 mm	
SL442D–W1	Whelen Pioneer Plus PCH1 75W	12V DC* - 40 amps 480W	10,130 lumens	40,520 lumens	8" x 54" x 22" 205 mm x 1,375 mm x 560 mm	55" x 36" x 22" 1,395 mm x 915 mm x 560 mm	
SL442D–W2	Whelen Pioneer Plus PFH2 150W	12V DC* - 65 amps 780W	20,261 lumens	81,044 lumens	8" x 54" x 33" 205 mm x 1,375 mm x 835 mm	55" x 36" x 33" 1,395 mm x 915 mm x 835 mm	

SEE PAGE 15 FOR INFO ON THE ABOVE TRAFFIC LIGHT BAR ADDITION

SL SERIES

2 HEAD

LEDs



TOWERS WITH 4.5-6.5-FOOT REACH

OPTIONS (SEE PAGE 3 FOR DESCRIPTIONS)

STROBE | COLOR | CAMERA | CONTROLS | LONG ARM



FRC Radiant Command



Whelen Pioneer Plus PFH2

DC	LIGHTING	POWER	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL422D-FR	FRC Radiant Command 120W	12V DC - 35 amps 420W	17,000 lumens	34,000 lumens	8" x 54" x 28" 205 mm x 1,375 mm x 710mm	55" x 36 " x 28" 1,395 mm x 915 mm x 710 mm	65 lbs 30 kg
SL422D-W1	Whelen Pioneer Plus PCH1 75W	12V DC* - 20 amps 330W	10,130 lumens	20,260 lumens	8" x 54" x 22" 205 mm x 1,375 mm x 560 mm	55" x 36" x 22" 1,395 mm x 915 mm x 560 mm	
SL422D-W2	Whelen Pioneer Plus PFH2 150W	12V DC* - 35 amps 480W	20,261 lumens	40,522 lumens	8" x 54" x 33" 205 mm x 1,375 mm x 840 mm	55" x 36" x 33" 1,395 mm x 915 mm x 840 mm	

SL SERIES STRAIGHT SHADOW

TOWERS WITH 3.5-FOOT REACH

The Straight Shadow is Command Light's most economical solution in maintaining efficient scene lighting. Featuring only elevated capabilities (and not rotation), this unit offers a 3.5' reach from its base. The Straight Shadow can also be easily modified to elevate cameras and antennas.



OPTIONS (SEE PAGE 5 FOR DESCRIPTIONS)

STROBE | COLOR | CONTROLS



FRC Radiant Command



Helios



Whelen Pioneer Plus PFH2

LEDs

DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SS322D-CH	(2) FireTech Helios 60W	12V DC - 20 amps 240W	14,000 lumens	28,000 lumens	9" x 42" x 30" 230 mm x 1,070 mm x 765 mm	43" x 45" x 30" 1,092 mm x 1,145 mm x 765 mm	45 lbs 20 kg
SS322D-FR	(2) FRC Radiant Command	12V DC - 30 amps 360W	17,000 lumens	34,000 lumens	9" x 42" x 30" 230 mm x 1,065 mm x 765 mm	43" x 45" x 30" 1,092 mm x 1,145 mm x 765 mm	
SS322D-W2	(2) Whelen Pioneer Plus PFH2 - 150W	12V DC - 34 amps 420W	20,261 lumens	40,522 lumens	8" x 42" x 30" 205 mm x 1,070 mm x 765 mm	43" x 45" x 30" 1,092 mm x 1,145 mm x 765 mm	



THE SHADOW SERIES can fit on SUVs, vans and pickup trucks.

C-LITE







Whether you're searching for a suspect or responding to a nighttime motor vehicle accident, equip your officers with the most versatile police car spotlight – **THE COMMAND LIGHT C-LITE**. This compact light features an LED spotlight/floodlight combo, 120° of tilt and optional rotation to illuminate areas not typically reached by fixed lights.

LEDs

OPTIONS

CONTROLS (PANEL MOUNTED OR WIRELESS)

MANUAL OR ELECTRIC ROTATION



FireTech Helios



FRC Radiant Command



Whelen Pioneer Plus™ PCH1

DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
CD113D-CH	(1) FireTech Helios 60W	12V DC - 12 amps 140W	14,000 lumens	14,000 lumens	9" x 12" x 19" 230 mm x 305 mm x 485 mm	21" x 12" x 19" 535 mm x 355 mm x 485 mm	35 lbs 16 kg
CD113D-FR	(1) FRC Radiant Command 120W	12V DC - 17 amps 200W	17,000 lumens	17,000 lumens	9" x 12" x 19" 230 mm x 305 mm x 485 mm	21" x 12" x 19" 535 mm x 305 mm x 485 mm	30 lbs 13 kg
CD127D-W1	(2) Whelen Pioneer Plus PCH1 75W	12V DC - 20 amps 230W	10,130 lumens	20,260 lumens	9" x 19" x 19" 230 mm x 485 mm x 485 mm	21" x 19" x 19" 510 mm x 485 mm x 485 mm	

Z-LIFT



LIGHT BAR ELEVATION



See the Z-Lift in action at commandlight.com/z-lift.

THE Z-LIFT Improve visibility by elevating your vehicle's warning lights above the roofline with Command Light's Z-Lift. This lift includes an umbilical remote with auto-deploy and auto-park feature. With the press of a button, the lift can be auto-deployed to be square or rotated 45° or 90° to save time.

- Elevates 40" in 10 seconds
- Rotates 90° (left and right), allowing the lightbar to be positioned toward oncoming traffic


DC	POWER REQUIREMENTS	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
Z-LIFT	12V DC - 17 amps 200W	6" x 22" x 47" 155 mm x 560 mm x 1,195 mm	43" x 22" x 75" 1,092 mm x 560 mm x 1,905 mm	62 lbs 28 kg



ADVISORY

TRAFFIC FLOW BOARDS With rotational capabilities and multiple arrow patterns, Command Light's Traffic Flow Boards significantly improve on-scene visibility and officer safety while conserving space when stowed. The versatile mounting system gives crews the ability to choose from three different traffic patterns. Each model comes with standard rotation, giving officers the ability to position traffic advisory arrows toward traffic to maximize safety when blocking traffic.

OUR MOST COMPACT FLOW BOARD

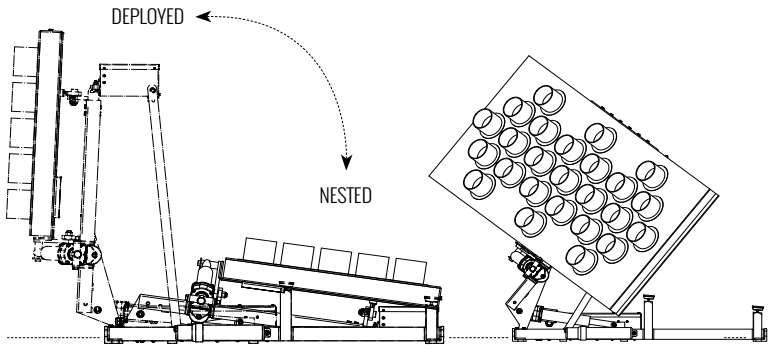


FOLD-DOWN DESIGN H MODELS)

The H Model features a fold-down design that mounts to the vehicle to create a low-profile. Once deployed, the flow board can be rotated toward oncoming traffic.




AVAILABLE IN THREE DIFFERENT TRAFFIC PATTERNS

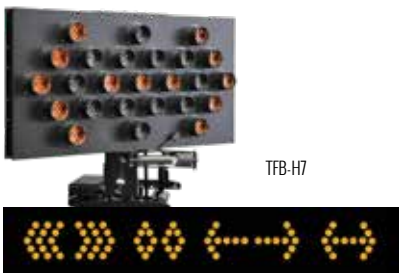

7 SERIES

Offers the greatest variety of traffic patterns.

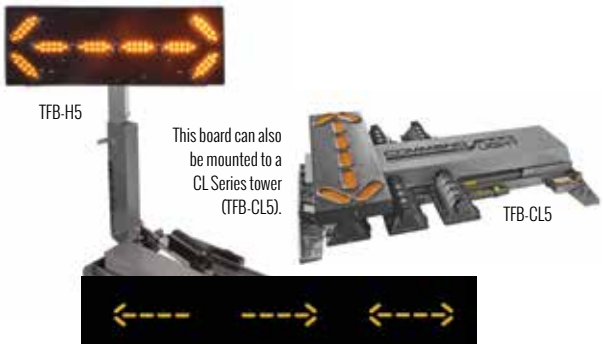

5 SERIES

Offers essential traffic patterns in a lighter design.



3 SERIES

Provides a pulsing movement to guide traffic.

DC	MOVEMENT	TRAFFIC PATTERN	POWER REQUIREMENTS	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
TFB-H7	Fold-down design	Greatest variety of traffic patterns	12V DC - 5 amps	16" x 60" x 46" 406 mm x 1,524 mm x 1,168 mm	44" x 60" x 66" 1,118 mm x 1,524 mm x 1,676 mm	150 lbs 68 kg
TFB-H5	Fold-down design	Essential traffic patterns	12V DC - 5 amps	8" x 48" x 40" 203 mm x 1,219 mm x 1,106 mm	52" x 70" x 40" 1,321 mm x 1,778 mm x 1,016 mm	80 lbs 36 kg
TFB-CL5	Fold-down design, mounted to a CL Series tower	Essential traffic patterns	12V DC - 5 amps + tower requirements	Variable based on tower selection	Variable based on tower selection	28 lbs + tower
TFB-SL3	Fold-down design, mounted to a Shadow Series tower	Directional light bar	12V DC - 5 amps + tower requirements	Variable based on tower selection	Variable based on tower selection	14 lbs + tower

OUR DIFFERENCE.

DEPLOYMENT

- ✔ Feature a patented (US Patent #5303621) movement, allowing endless positions
- ✔ Can overhang the side of a vehicle in Command Light's exclusive streetlight position
- ✔ Deploys fully in less than 15 seconds with the press of a button
- ✔ Stows quickly with a one-touch auto-park feature

DURABILITY

- ✔ 100% electric, meaning no air or hydraulics
- ✔ Operable in ALL weather conditions
- ✔ Virtually maintenance free
- ✔ Built with aircraft-grade aluminum alloy to add strength while reducing weight

INDUSTRY-LEADING **5-YEAR** WARRANTY

Command Light products come with an industry-leading, five-year warranty against any defects in materials and workmanship when used and operated for a period of five years. Excludes malfunctions related to misuse, accident, neglect or normal wear-and-tear, as well as light-producing components (bulbs, lasers, LEDs), which come with their own manufacturer's warranty.



COMMAND LIGHT

COMMANDLIGHT.COM | 800.797.7974 | 3842 REDMAN DR. FORT COLLINS CO 80524

See a Command Light representative or authorized dealer for details. All information in this brochure is the latest available at the time of publication. Printed in the USA. 1K 0720 ©2026 Command Light